

Date

Mar. 27 , 2020

Released

C band 250kW Magnetron

Model No. M1913SV

Copyright© 2020
New Japan Radio Co., Ltd.
Microwave Division

-Notice of Proprietary Information-

This document and its contents are proprietary to New Japan Radio Co., Ltd.
This publication and its contents may not be reproduced or distributed for any other purpose
without the written permission of New Japan Radio Co., Ltd.
Those specifications listed in this document are subject to change at any time, without notice.

New Japan Radio Co., Ltd.
Microwave Division

Title:

Datasheet of M1913SV

Reference No.:

DS-M1913SV

Rev.:

06E

Sheet:

1/5

■ GENERAL DESCRIPTION

M1913SV is a mechanically tunable frequency pulsed type C-band magnetron designed to operate in the frequency range of 5450MHz to 5750MHz with a peak output power of 250kW.

It is a waveguide output type and is forced air cooled.

A permanent magnet is packaged as part of the magnetron.



■ GENERAL CHARACTERISTICS

ELECTRICAL

PARAMETERS		
Heater voltage	(note 1)	9.5V
Heater current		11A
Minimum pre-heat time		300 sec

MECHANICAL

PARAMETERS		
Overall Dimensions		See outline
Mounting position		Any
Cooling		Forced air.
Output		WR187 waveguide
Output coupling		Mates with UG-148C/U flange.

■ ABSOLUTE MAXIMUM RATINGS

These ratings cannot necessarily be used simultaneously and no individual ratings should be exceeded.

PARAMETERS	Minimum	Maximum	Unit
Heater voltage	-	10.5	V
Heater current	-	13	A
Heater surge current	-	30	A
Cathode preheating time	300	-	sec
Anode voltage (peak)	-	29.0	kV
Anode current (peak)	15	32	A
input power (peak)	-	928	kW
input power (average)	-	928	W
Rate of rise of voltage pulse (note 6)	70	100	kV/ μ s
Duty cycle	-	0.0012	-

* Above Specifications are subject to change without notice.

PARAMETERS	Minimum	Maximum	Unit
Pulse duration	0.2	3.5	μs
Pulse recurrence rate	-	2400	pps
Anode temperature	-55	115	°C
Cathode bushing temperature	-55	250	°C
VSWR at load	-	1.5:1	-
Tuner torque	-	0.98	N·m
	-	10	kgf·cm
Pressurizing of output circuit	0.1	0.31	Mpa(abs.)
	1	3.2	kg/cm ² (abs.)

■ ELECTRICAL CHARACTERISTICS

Test conditions	Oscillation	Units
Heater voltage (preheating)	9.5	V
Heater voltage (for test)	7.5	V
Anode current (average)	24	mA
Duty cycle	0.001	-
Pulse duration	1.7~2.3	μs
VSWR at the output coupler	1.1:1	-
Rate of rise of voltage pulse (note 6)	85~95	kV/μs
Pressurizing of output circuit	0.15~0.2	MPa
	1.5~2	kg/cm2

Limits	Minimum	Maximum	Units
Anode voltage (peak) (Frequency=5625MHz)	26.8	28.3	kV
Output power (average) (note 3)	250	-	W
Tunable Frequency			
Upper Limit	5750	-	MHz
Lower Limit	-	5450	MHz
R.F. bandwidth at 1/4 power (note 3,5)	-	2.5/t _p	MHz
Minor lobes (note 3,5)	8	-	dB
Stability (note 2,3,4)	-	0.5	%
Heater current Ef=9.5V, tk=180sec min	10	12	A
Spurious output ratio (note 3,7)	-45	-	dBc
Impedance (note 8)	1100	1200	Ω

* Above Specifications are subject to change without notice.

■ LIFE TEST

Life Test conditions

Under the test conditions specified above.

The magnetron is deemed to have reached end of life when it fails to satisfy the following:

PARAMETERS	Minimum	Maximum	Units
Output power (average) (note3)	200	-	W
R.F. bandwidth at 1/4 power (note3,5)	-	3.0/tpc	MHz
Stability (notes 2,3,4)	-	1.0	%

Notes

1. With no anode input power.

During high voltage operation it is essential to operate the heater according to the following schedule:

$$\text{Heater voltage(for test)} = 9.5(1 - P_i/2850) \text{ volts}$$


Where P_i = average input power in watts.

The magnetron heater shall be protected against arcing by use of a minimum capacitance of 4000pF shunted across the heater directly at the terminals.

2. Pulses are defined as missing when the r.f. energy level is less than 70% of the normal energy level in the rated frequency range of the magnetron. Missing pulses are expressed as a percentage of the number of input pulses applied during the last 3 minutes of a test interval not to exceed 6 minutes.
3. These tests are carried out at
 - F1=5450±20MHz,
 - F2=5600±20MHz,
 - F3=5750±20MHz.
4. With the magnetron operating into a V.S.W.R. of 1.3:1 phased to give maximum instability.
5. With the magnetron operating into a V.S.W.R. of 1.3:1 phased to give maximum spectrum degradation.
6. The rate of rise of voltage is the slope of the steepest tangent to the leading edge of the voltage pulse above 70% amplitude. Any capacitance used in the viewing system must not exceed 6.0pF.
7. Spurious output ratio shall be measured in accordance with MIL-STD-1311C, method 4243A. Spurious output signals are measured within 5GHz to 6GHz.
8. These tests are carried out at
 - Frequency=5600±20MHz
 - Output power (peak)=280kW

* Above Specifications are subject to change without notice.

■ OUTLINE

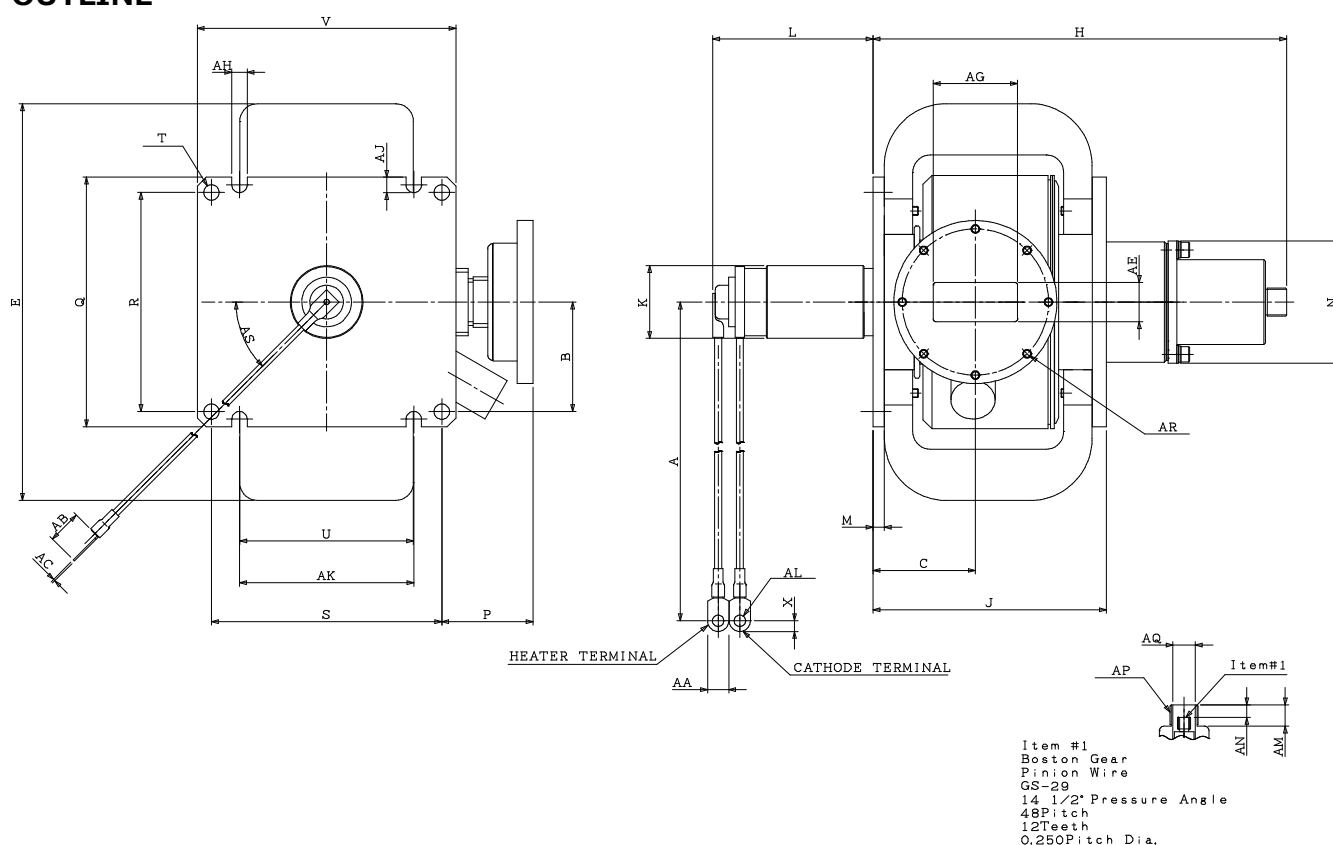

Outline Dimensions (All dimensions without limits are nominal)

Ref.	Min.	Max.	Ref.	Min.	Max.	Ref.	Min.	Max.
A	210.0	230.0	R	123.55	124.05	AJ	8.4	
B	58.72	65.07	S	129.75	130.25	AK	98.15	98.65
C	57.0	58.4	T	φ8.5	φ8.9	AL	φ6.4	
E	—	226.21	U	—	98.0	AM	12	
H	—	235.45	V	—	147.3	AN	7	
J	—	131.57	X	6		AP	5/8-24-NEF-2	
K	—	φ41.66	AA	12		AQ	φ12.3	φ12.9
L	—	92.08	AB	19		AU	No10-32-Nf-2	
M	6.35		AC	1		AS	45°	
N	—	φ74.7	AE	22.15				
P	49.92	53.12	AG	47.55				
Q	—	141	AH	8.4				

(Dimensions in millimeters)

* Above Specifications are subject to change without notice.