

MA26

シリコン拡散接合型/Si Diffused Junction

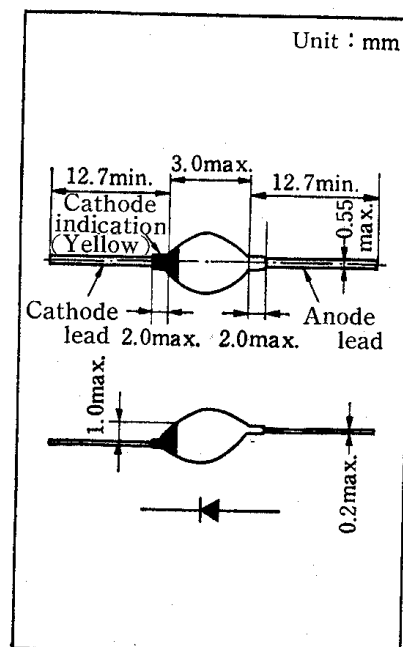
温度補償用/Temperature Compensation
減電圧補償用/Voltage Compensation

特 徴/Features

- 順電圧温度係数 $\Delta V_F/\Delta T$ が小さい。/ Small $\Delta V_F/\Delta T$

最大定格/Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Item	Symbol	Value	Unit
順方向電流	I_F	20	mA
許容電力損失	P_D	20	mW
保存温度	T_{stg}	$-30\sim+75$	$^\circ\text{C}$

電気的特性/Electrical Characteristics ($T_a=25^\circ\text{C}$)

Item	Symbol	Condition	min.	typ.	max.	Unit
順方向電圧	V_F	$I_F=1.5\text{mA}$	0.56		0.61	V
順電圧温度係数	$-\Delta V_F/\Delta T$	$I_F=1.5\text{mA}$	1.5			mV/ $^\circ\text{C}$

