



Service Manual

Washing machine

Toploader

AWT 2074

Model Version	AWT 2074 8561 207 10140	Page
	Technical data	2 - 3
	Spare part list	4
	Exploded view	5 - 6
	Wiring diagram	7 - 8
	Circuit diagram to 49/ 99	9
	Circuit diagram from 04/ 00	10
	Program diagram	11
	Family	A2

Technical data

Dimensions

Height	85	cm
Width	40	cm
Depth	60	cm

Weight

Net weight	61	kg
With packing	64	kg

Main connection

Voltage	230 ± 10%	V
Frequency	50	Hz
Power consumption	2.3	kW
Fuse rating	10	A

Drum

Volume	42	l
Wash spin	54	rpm
Speed spinning	700	rpm

Capacity of dry laundry

Cotton/coloured laundry	5/ 4,5	kg
Cotton rapid	3	kg
Easy care	2.5	kg
Easy care rapid	1.5	kg
Delicate	1.5	kg
Wool	1	kg

Pressostat for washing-machine

Level1

Switching point	35 ± 5	mmWc
Reset	15 ± 5	mmWc

Level2

Switching point	65 ± 5	mmWc
Reset	35 ± 5	mmWc

Overflow

Switching point	300± 20	mmWc
-----------------	---------	------

Water column drum

Level2

Switching point	50 ± 5	mm
-----------------	--------	----

Overflow

Switching point	285± 20	mm
-----------------	---------	----

Nominal current

Contacts:

11 - 12	0.5-1mA/ 5VDC
11 - 14	0.5-1mA/ 5VDC
21 - 12	4 (4) A
21 - 24	16 (4) A
21 - 26	1 (1) A

Contacts system:

11 - 12 - 14	jump contacts
21 - 22 - 24	jump contacts
21 - 26	slow action contacts

Door lock

Lock time (0-85°C)	<5"
Unlock time after 30" on	110± 30"
Nominal voltage	250 V
Nominal current contacts:	
4 - 5	16 (4) A

Heating element

Kind of heating	Tubular heating element
Nominal voltage	230 V
Nominal power	2050 W
Heat conductor resistance R 25	25,8 ± 5% Ω
Working temperature max.	120 °C

Water inlet valve

Water temperature max.	90 °C
Rated flow	> 1 bar 8 l/min.
Pressure range	0.2-10 bar
Nominal voltage	220-240 V
Frequency	50 Hz
Starting voltage	0.2-10 bar 170 V
Nominal current	40 mA
Nominal power	8.8 VA
Nominal resistor (20°C)	3.8± 10% Ω

Drain pump (synchronous)

Nominal voltage	230 V
Nominal current	0.3 A
Nominal consumption	34 W
Frequency	50 Hz
Resistor (coil)	164 ± 7% Ω
Motor protection	no
Capacity (125m height)	14± 2 l/min

Technical data**Program timer**

Type	Electromechanical		
Fab.	EC 4774 (Timer A2)		
Nominal voltage	230	V	
Frequency	50	Hz	
Total positions	60		
Pre wash	pos. 01		
Main wash	pos. 06		
Rinse	pos. 21		
Spin	pos. 33/ 58		
Stop	pos. 37/ 60		
Ambient temperature	to 70	°C	
Storage temperature	to 85	°C	

Motor

Type	MCA 30/64 - 148 / ALA1		
	i = 1 :17.3		
Pulley diameter	16.5	mm	
Resistance:			
Contact 6 - 7	68.7	± 7% Ω	
Collector directly	3.07	± 7% Ω	
Field winding 2 - 3	2.40	± 7% Ω	
Tacho (at 825 rpm on motor) 1 - 2		V	
Tacho pole pairs	16		
Protector, current sensitive	150	°C	
Sense of rotation in spinning, in view on pulley side clockwise			

Radio interference supression

Nominal voltage	230	V	
Nominal capacity	470nFX1+2x22nFY		
Nominal inductance	2 x 1	mH	
Nominal resistance	680	kΩ	

Thermostat Bi-metal 60°C

ON	40 ± 4	°C	
OFF	55 ± 3	°C	
Rated voltage	250	V	
Rated current	16(3)	A	

Variable thermostat

Nominal voltage	230	V	
Nominal current	10	A	
Temperature range	28 - 80	°C	

Motor electronic 700 rpm

Type	RN 2239
------	---------

Rotary switch

Main switch on/off+ no spin	3 pos.
Temperature selector	7 pos.

Push button switch

Half load	SHL
Rinse hold	SRS
Eco	SEC

Spare part list


Model
Service No.
Version

AWT 2074
856120710140
856120710140

Pos. No.	12NC Code	Description
002 0	4812 459 38027	Flap round
002 1	4812 459 38028	Hinge Flap
004 0	4812 440 19625	Drip tray assy
010 0	4812 459 48056	Door frame inner
010 1	4812 459 48057	Door frame outer
011 0	4812 462 48054	Foot
012 7	4812 310 18497	Trolley kit front
012 8	4812 528 78046	Foot adjustable rear
021 0	4812 440 19626	Front,panel
022 0	4812 440 19628	Side panel right
022 1	4812 440 19629	Side panel left
024 0	4812 440 19631	Rear panel
025 0	4812 440 19632	Support
040 0	4812 417 18815	Hinge bolt
061 0	4812 466 88489	Counter weight
061 1	4812 466 88491	Counter weight front
061 2	4812 466 88492	Counter weight bottom
081 4	4812 529 18043	Shock absorber
086 2	4812 401 18412	Stopper
086 3	4812 529 18044	Clamp absorber
086 4	4812 529 18045	Pin f. absorber
086 5	4812 529 18046	Shaft f. absorber
100 1	4812 440 19634	Lid outer
100 3	4812 440 19635	Lid inner
100 5	4812 440 19636	Lid assembly
110 4	4812 440 19641	Handle cpl.
130 0	4812 417 18849	Hook f. Door
191 0	4812 466 68596	Door bellow
191 1	4812 492 98014	Strap f. bellow
200 0	4812 418 18242	Tub 4fix points
201 0	4812 440 19644	Cover cpl.
220 0	4812 418 18243	Drum
223 0	4819 418 49713	Drum lifter
271 0	4812 358 18167	Belt Poly V 1204 H8 MA
272 0	4812 528 88083	Pulley 298 mm
290 0	4812 532 68078	Gasket
301 0	4812 452 10065	Control panel
331 0	4812 412 58818	Knob Timer
331 1	4812 412 58817	Knob Options
332 0	4812 410 28583	Button Options
339 0	4812 413 58947	Adapter Shaft
339 1	4812 413 59007	Adapter
351 0	4812 134 48227	Pilot lamp
351 1	4812 124 18001	Cover pilot lamp
400 0	4812 361 58146	Motor AC
421 0	4812 121 18142	Interf.filter 1,00 µ F
421 1	4812 121 18197	Cover interf.filter
430 0	4812 360 18472	Pump,draining
451 0	4812 259 28703	Heating element with hole
490 0	4812 321 18066	Cable,mains EU/2m
490 1	4812 321 28367	Strain relief
500 0	4812 285 18002	Timer EC 4774 (A2)
521 0	4812 214 78455	Control unit RN2239 A2-
552 0	4812 282 48235	Thermostat monopack 60 °C
554 0	4812 282 48234	Thermostat variable


Pos. No.	12NC Code	Description
571 0	4812 281 28393	Valve,magnet
571 1	4812 281 18049	Cover f. valve
581 0	4812 271 28396	Pressostat
620 0	4819 410 29005	Switch Options NC
620 2	4812 276 28369	Switch options CO
625 0	4819 276 38362	Selector,switch
630 0	4812 271 38373	Door lock hybrid
701 0	4819 530 29034	Hose, inlet
702 2	4812 530 28871	Hose VALVE-DISPENSER
707 0	4812 526 48044	Nozzle box cold cpl.
707 1	4812 526 48049	Clamp f. nozzle box
712 6	4812 418 68164	Clip SOAP DISPENSER
712 9	4812 418 68186	Soap dispenser cpl. 4
717 0	4812 323 18179	Cam A1/A2
717 1	4812 323 18024	Lever metal
717 2	4812 323 18021	Lever adjustment (metal)
717 3	4812 323 18181	Lever adjustment
717 4	4812 323 18182	Lever
717 5	4812 323 18025	Support lever metal
753 0	4812 418 68187	Chamber,air
754 0	4812 530 28938	Drainhose
754 1	4812 530 28832	Lock eco
760 0	4812 480 58089	Filter set pump
781 0	4812 530 28953	Drainhose
782 0	4812 530 28941	Hose Pressostat
787 0	4812 530 28942	Hose Air Exhaust
787 1	4812 530 28943	Hose Cover
794 0	4812 530 58098	Gasket Airtrap
900 0	4812 290 68157	Strap SNP 8
900 1	4812 401 18431	Clamp to pump
900 2	4812 401 18461	Support cable/hose
900 3	4819 401 18529	Clamp,hose
900 4	4819 401 18362	Strap SNP 8
901 0	4812 401 18462	Clamp,hose drain hose
910 0	4812 502 48347	Screw,selftap 3,5x14SS
910 1	4812 502 38151	Screw 4x14
910 3	4812 502 18404	Screw
910 4	4812 502 18423	Screw PT 7x15
910 5	4812 502 18401	Screw M8X 35
910 6	4812 502 18399	Nut Push in M 8
921 0	4812 400 18047	Washer
930 1	4812 492 48085	Torsions spring
930 2	4812 492 48162	Spring
930 3	4812 323 18019	Spring f. lever
941 0	4812 310 18578	Bearing Kit
953 0	4812 325 68001	Shaft seal
962 0	4812 440 19645	Cover f. Motor
990 0	4812 310 18504	Fixing mat.set front counter
990 2	4812 310 18506	Fixing mat.set bottom
993 0	4819 530 29028	Bow
993 1	4812 290 18025	Clamp heatingelement


Exploded view

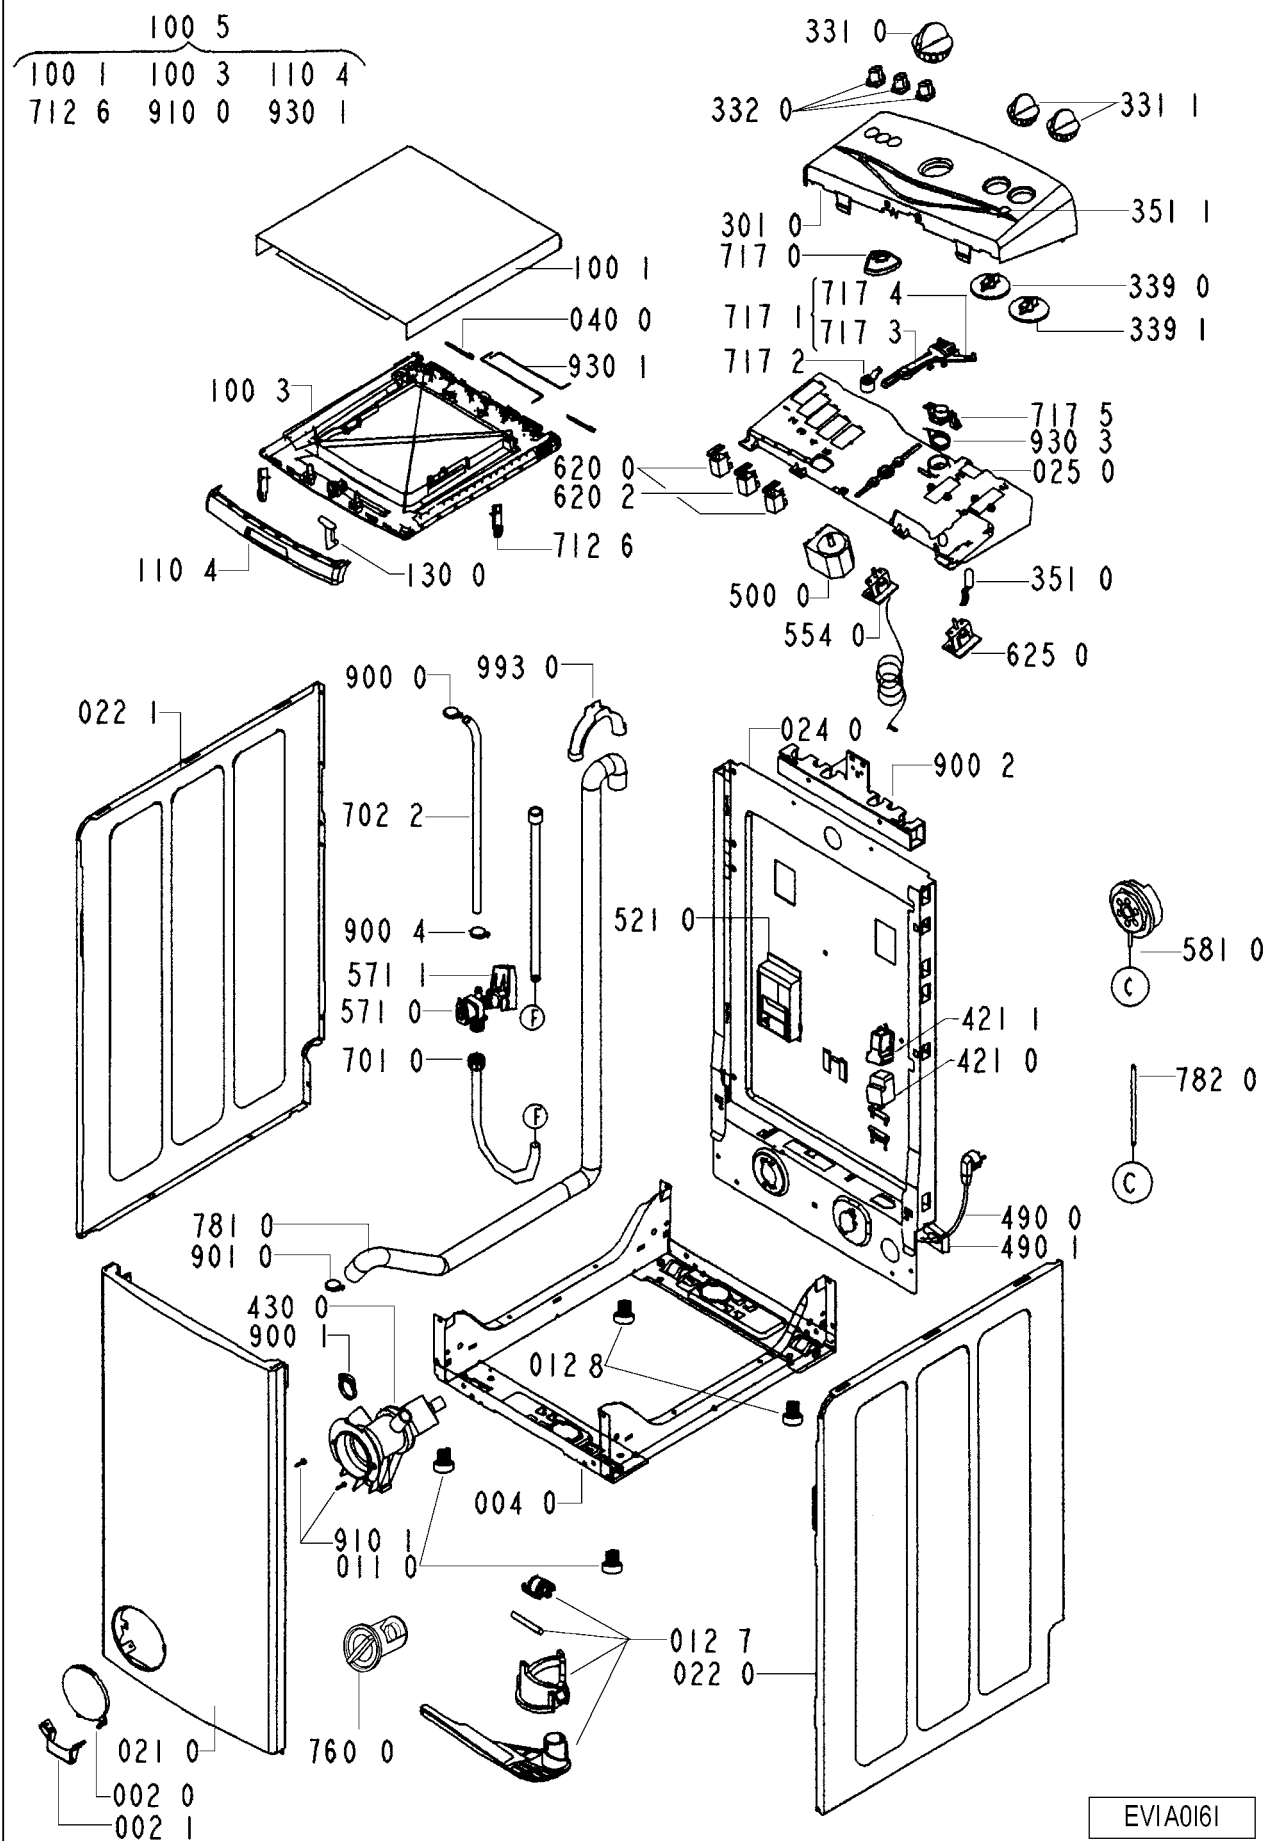


EVIA0161

Exploded view

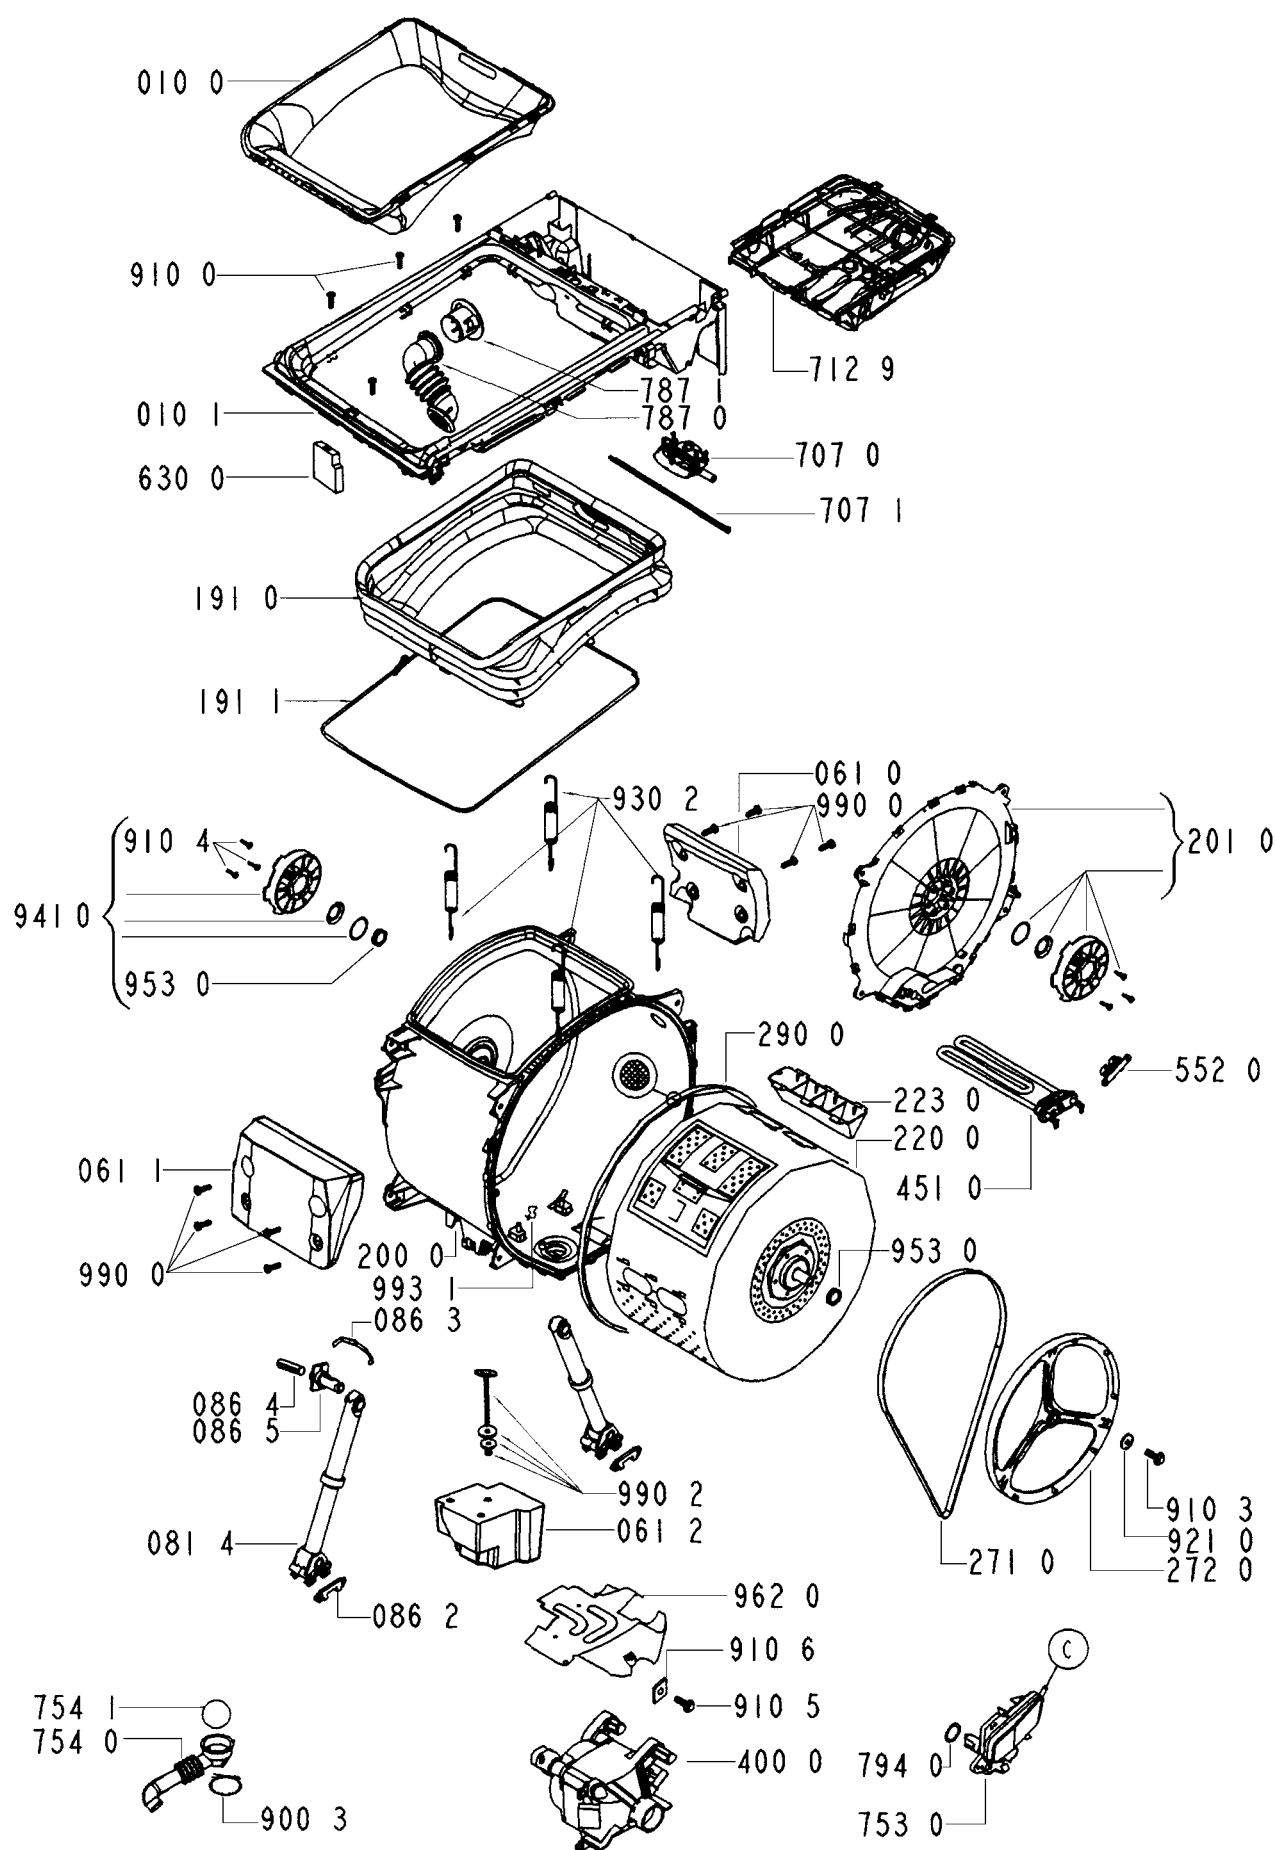

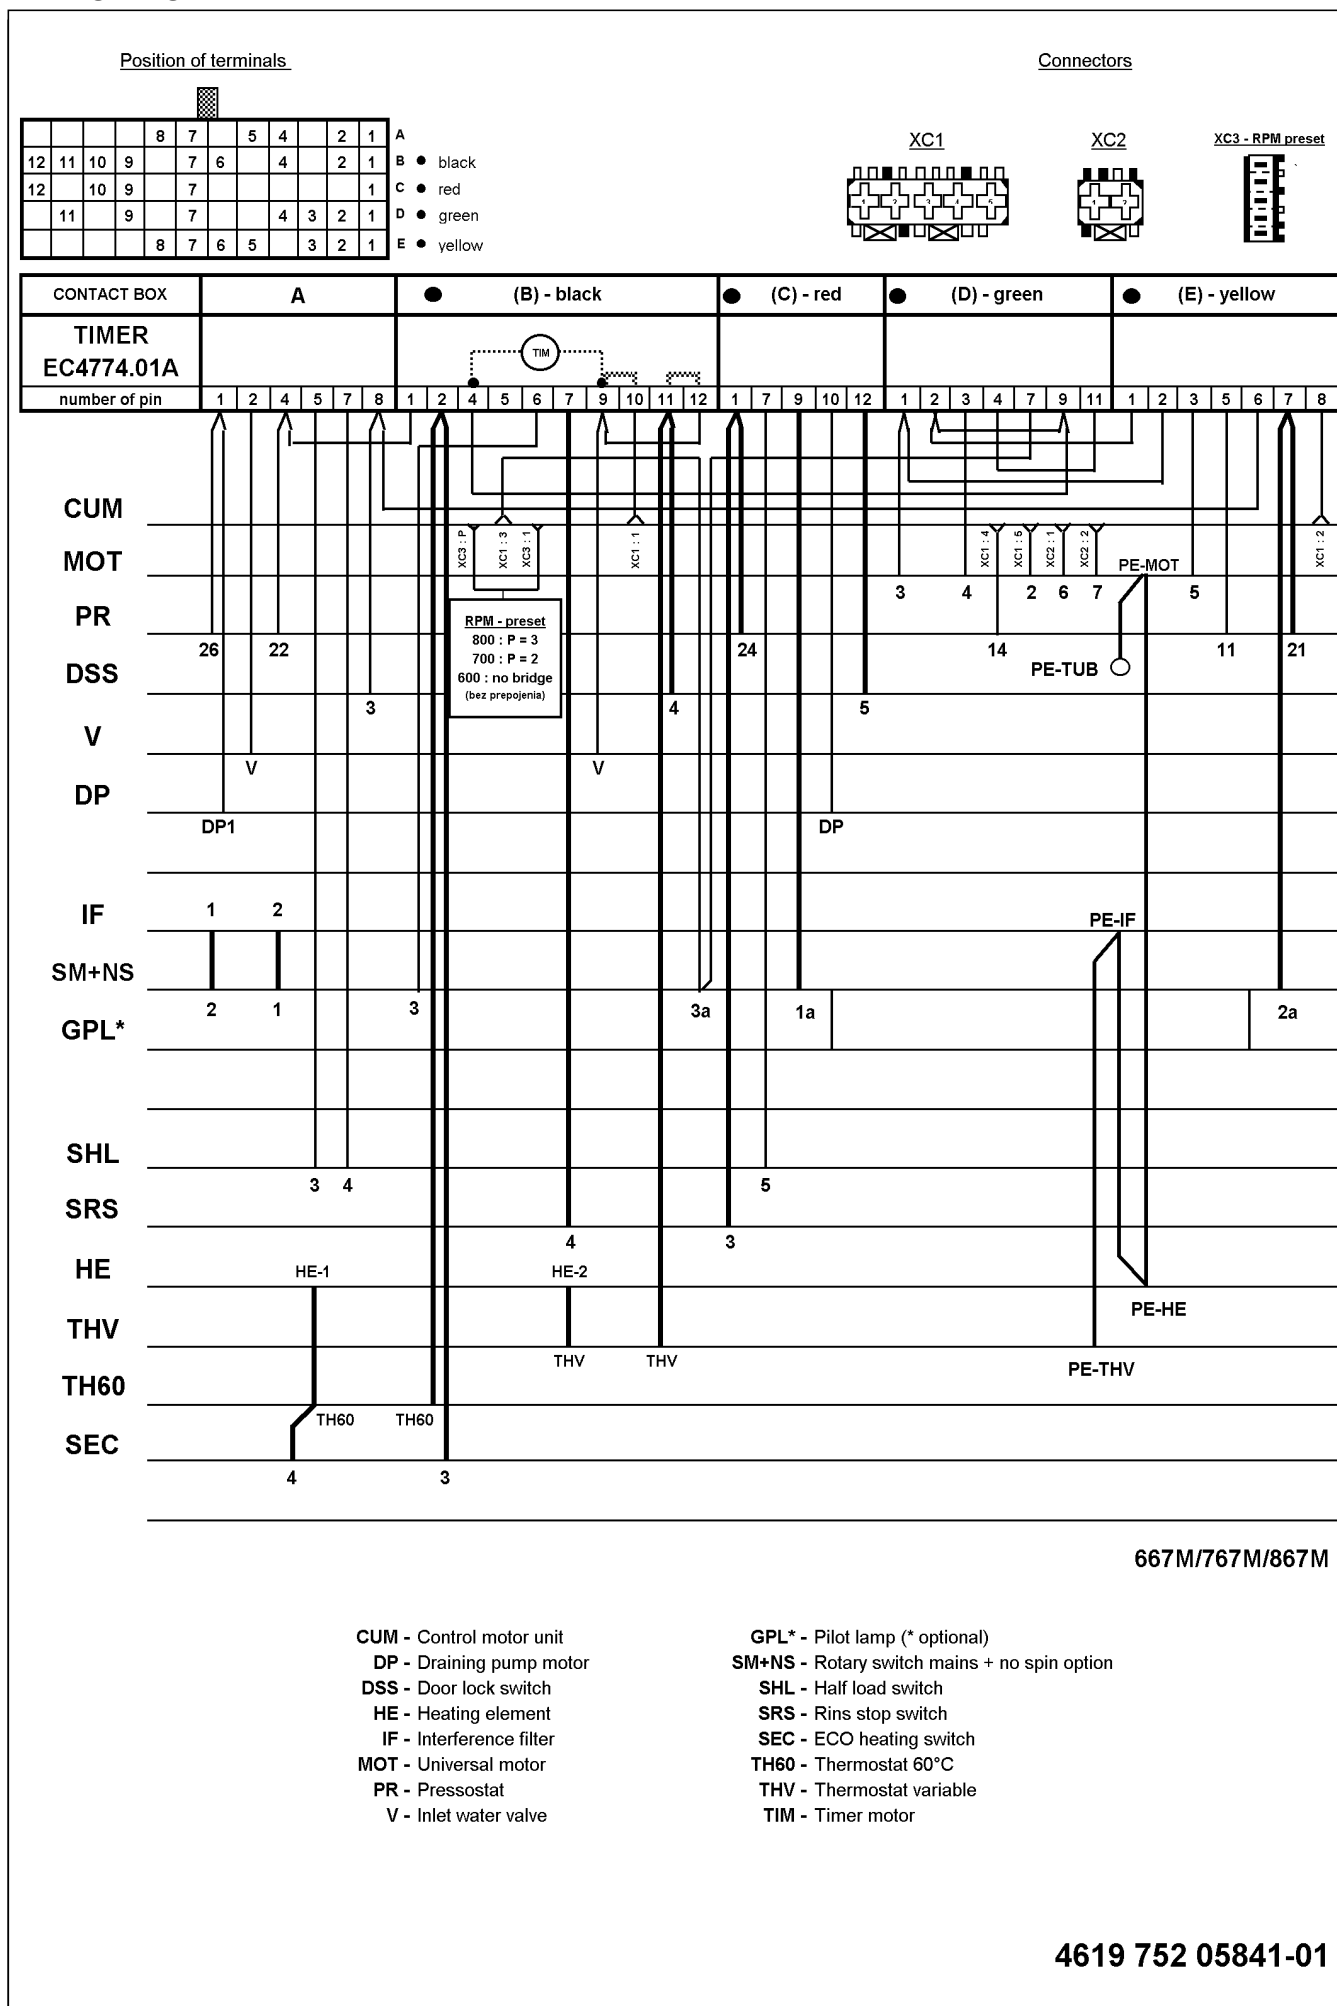


Circuit diagram to 49/ 99

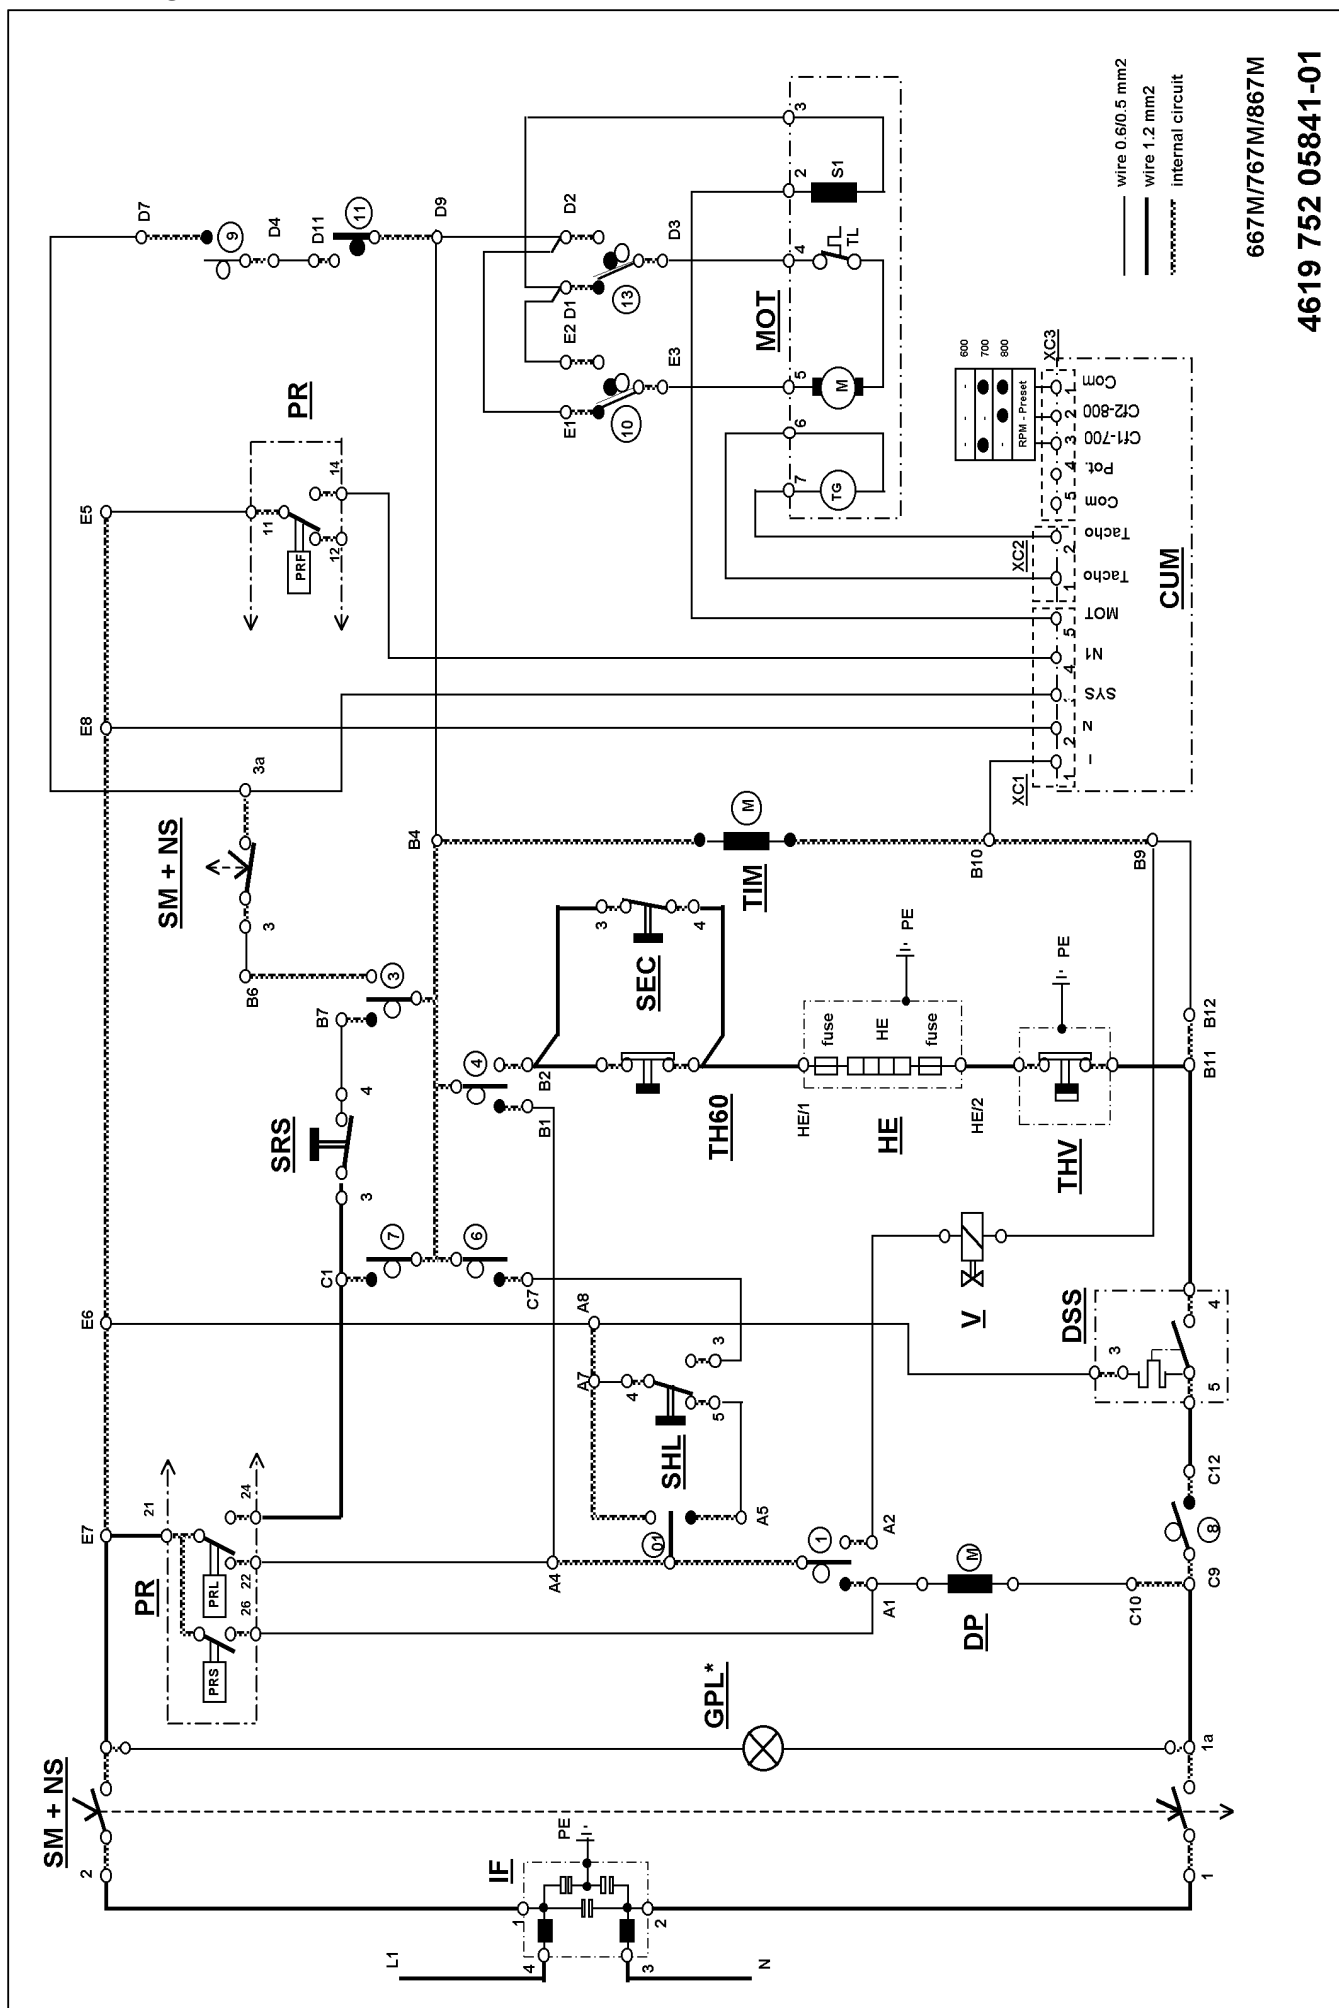

667M/767M/867M

4619 752 05841-01

Circuit diagram from 04/ 00

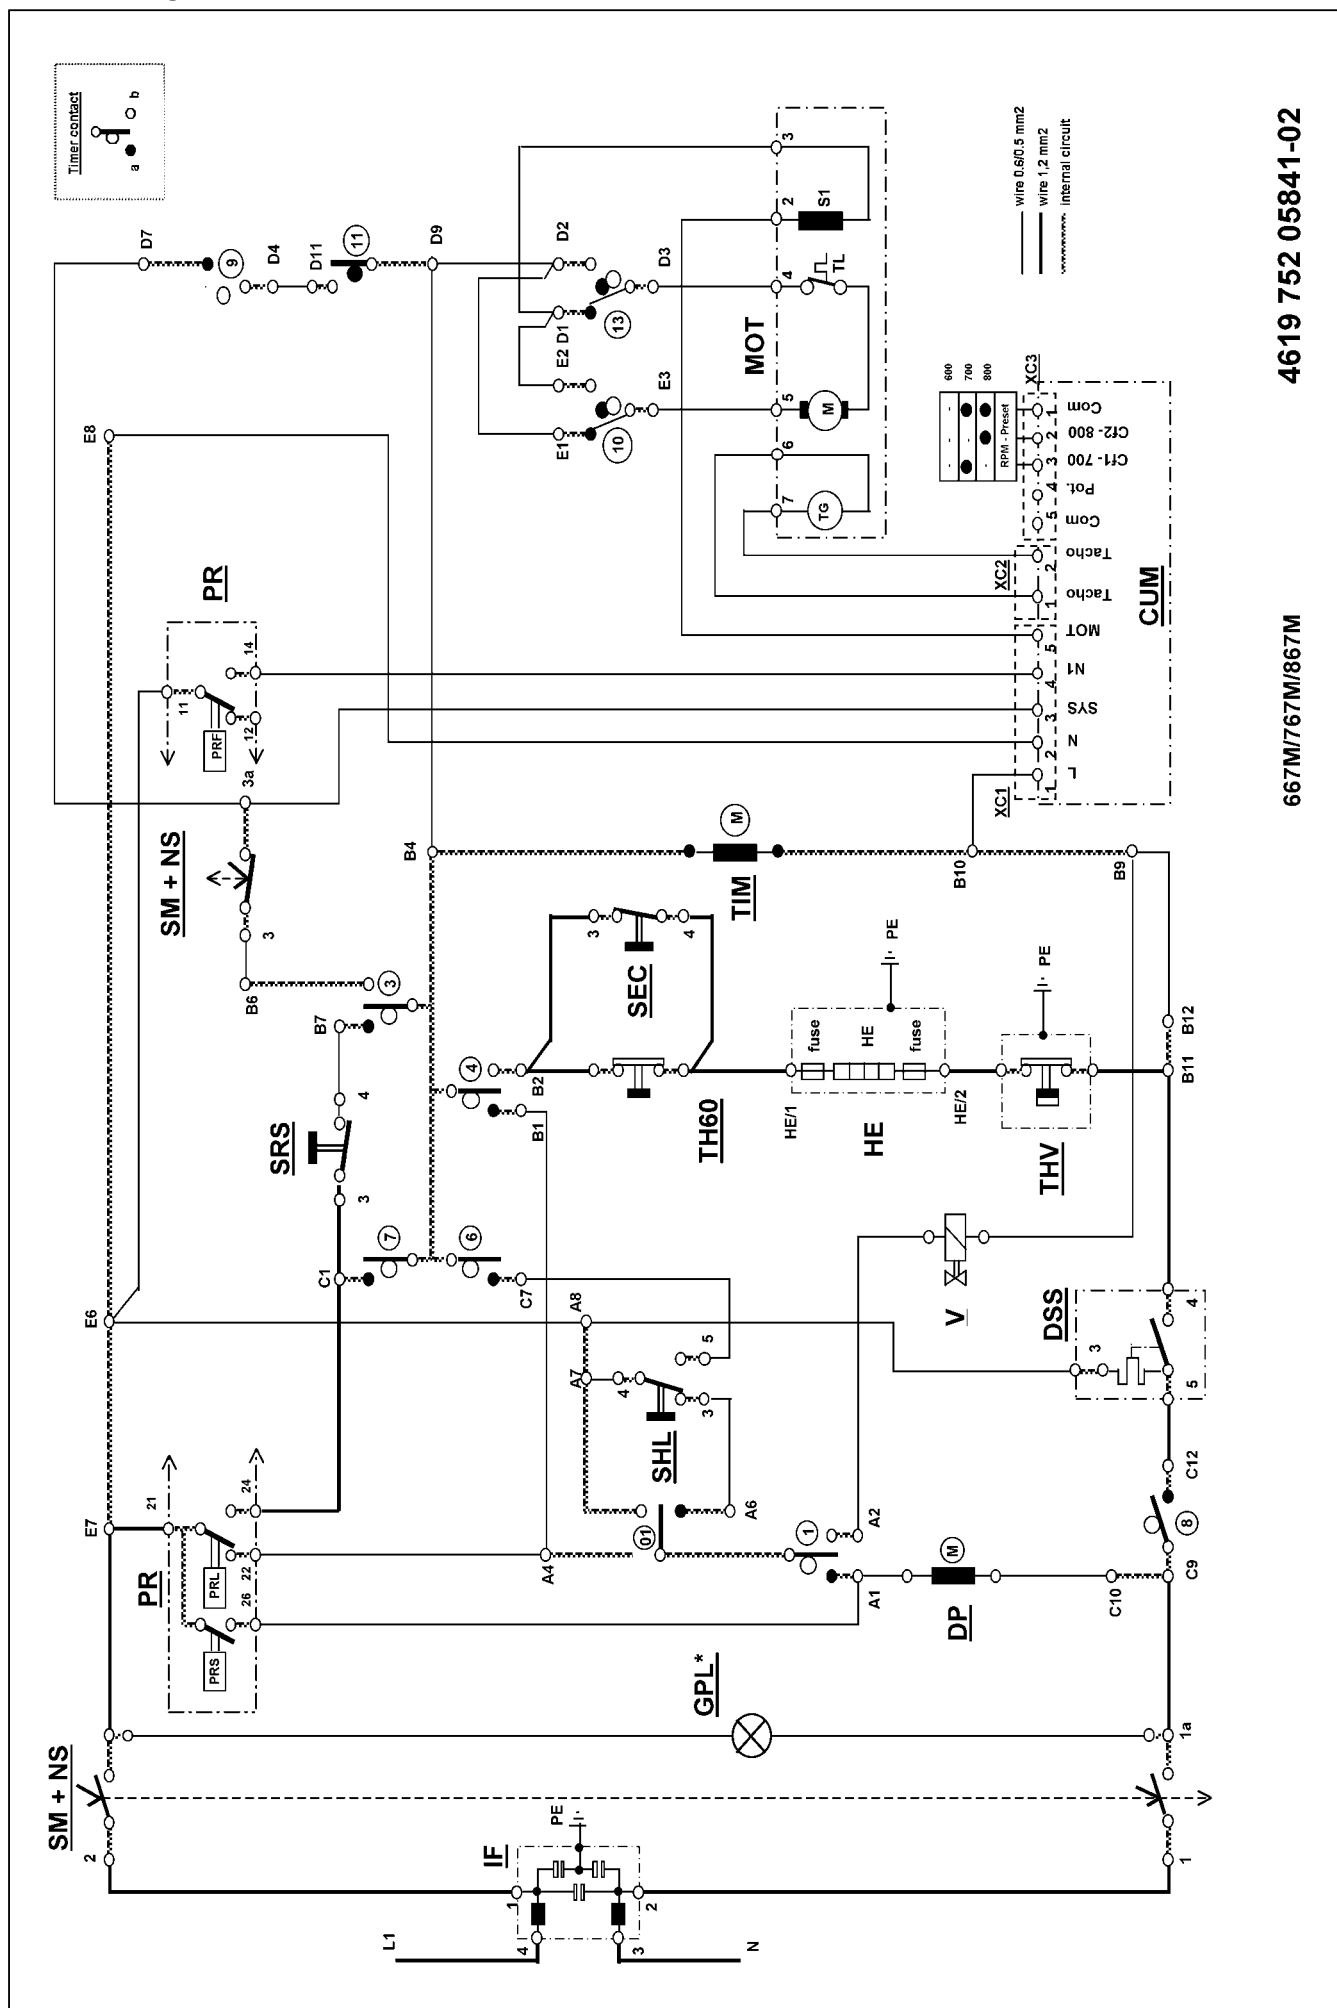

Program diagram

